



# AMWP1100

## 自行走桅柱式高空作业平台 (单桅转向)



### Dingli AMWP 8-1100 AMWP 9.5-1100

安全工作载荷	150kg	125kg
最大工作人数	1	1
<b>H<sub>1</sub></b> 最大工作高度	8.00m	9.50m
<b>H<sub>2</sub></b> 最大平台高度	6.00m	7.50m
<b>A</b> 整机长度	1.41m	1.41m
<b>B</b> 整机宽度	0.76m	0.76m
<b>H<sub>3</sub></b> 整机高度	1.99m	1.99m
工作平台尺寸(长×宽)	0.78m × 0.70m	0.78m × 0.70m
平台延伸尺寸(选配)	0.55m	0.55m
最小离地间隙(收拢状态)	0.05m	0.05m
最小离地间隙(起升状态)	0.019m	0.019m
轴距	1.07m	1.07m
最小转弯半径(内轮/外轮)	0/1.55m	0/1.55m
驱动电机	2×24VDC/0.5kW	2×24VDC/0.5kW
起升机电	24VDC/2kW	24VDC/2kW
机器行驶速度(收拢状态)	4km/h	4km/h
机器行驶速度(起升状态)	1.1km/h	1.1km/h
上升/下降速度	24/25sec	31/24sec
蓄电池	2×12V/85Ah	2×12V/85Ah
充电器	24V/11A	24V/11A
最大爬坡能力	25%	25%
工作最大允许角度	1.5°/3°	1.5°/3°
轮胎	Φ305×100mm	Φ305×100mm
整机重量(标准)	1060kg	1120kg
整机重量(带延伸平台)	1102kg	1162kg

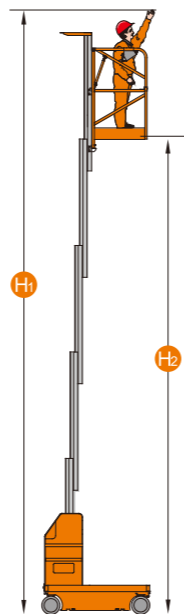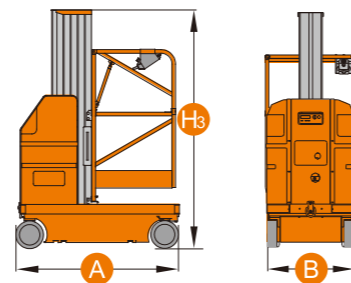

自动坑洞保护系统



紧凑转弯半径



紧急下降系统



爬坡能力



### 标准配置

- 比例控制
- 自动坑洞保护
- 横杆门
- 全行程行走
- 无痕轮胎
- 4X2驱动
- 自动刹车系统
- 紧急下降系统
- 紧急停止按钮
- 油管防爆系统
- 故障诊断系统
- 倾斜保护系统
- 动作蜂鸣
- 喇叭
- 工作时间表
- 标准运输叉车孔
- 充电保护系统
- 频闪灯

### 选装配置

- 超重传感器
- 连接到平台的AC电源
- 平台工作灯
- 连接到平台的导气管
- 延伸平台