

ZDYT-S



自行走高空取料平台



Dingli ZDYT 3-3.0S ZDYT 3-3.7S ZDYT 3-4.5S



安全工作载荷	300kg	300kg	300kg
最大工作人数	1	1	1
H₁ 最大工作高度	5.00m	5.70m	6.50m
H₂ 最大平台高度	3.00m	3.70m	4.50m
A 整机长度	1.56m	1.56m	1.57m
B 整机宽度	1.06m	1.06m	1.06m
H₃ 整机高度	2.06m	2.41m	2.28m
工作平台尺寸(长×宽)	0.71m×0.80m	0.71m×0.80m	0.71m×0.80m
最小离地间隙	0.08m	0.08m	0.08m
轴距	1.30m	1.30m	1.32m
最小转弯半径	0	0	0
驱动电机	2×24VDC/0.4kW	2×24VDC/0.4kW	2×24VDC/0.4kW
起升电机	24V/2.2kW	24V/2.2kW	24V/2.2kW
机器行驶速度(收拢状态)	4.0km/h	4.0km/h	4.0km/h
机器行驶速度(起升状态)	0.8km/h	0.8km/h	0.8km/h
上升/下降速度	18/17sec	22/19sec	20/17sec
蓄电池	2×12V/105Ah	2×12V/105Ah	2×12V/105Ah
充电器	24V/11A	24V/11A	24V/11A
最大爬坡能力	25%	25%	25%
工作最大允许角度	2°	2°	2°
轮胎(驱动轮)	Φ230×80mm	Φ230×80mm	Φ230×80mm
轮胎(前轮)	6in	6in	6in
整机重量	690kg	720kg	820kg

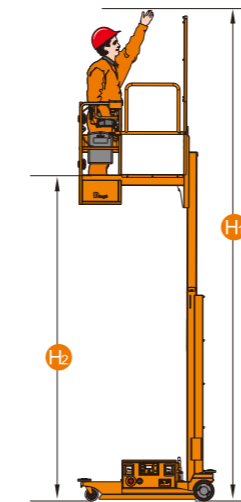

标准配置

- 比例控制
- 平台自锁门
- 全行程行走
- 无痕轮胎
- 4X2驱动
- 自动刹车系统
- 紧急下降系统
- 紧急停止按钮
- 油管防爆系统
- 故障诊断系统
- 倾斜保护系统
- 动作蜂鸣
- 喇叭
- 工作时间表
- 坑洞保护系统
- 充电保护系统
- 频闪灯

选装配置

- 超重传感器
- 平台工作灯
- 底盘塑料保护罩



防撞轮



抽屉式设计



平台自锁门



动作蜂鸣