


# MCWP(Single)

## 导架爬升式高空作业平台

(单桅)

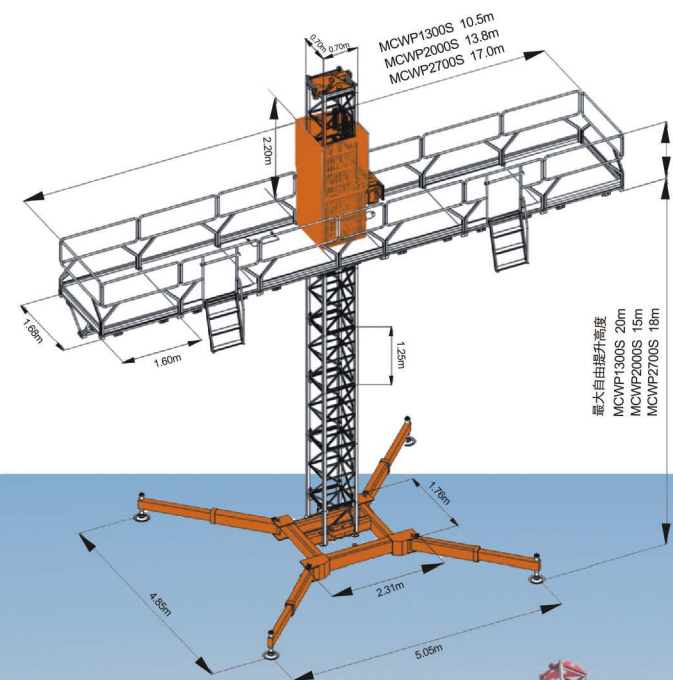

### Dingli MCWP1300S / MCWP2000S / MCWP2700S

最大平台长度/安全工作载荷	
MCWP1300S.....	4.2m / 1300kg
	7.4m / 1000kg
	10.5m / 700kg
MCWP2000S.....	4.2m / 2000kg
	7.4m / 1700kg
	10.5m / 1400kg
	12.5m / 1200kg
	13.75m / 900kg
MCWP2700S.....	4.1m / 2700kg
	7.3m / 2300kg
	10.5m / 1900kg
	13.7m / 1500kg
	16.9m / 1000kg
最大自由提升高度	
MCWP1300S	
-全部支腿打开.....	20m
-单侧支腿打开.....	15m
MCWP2000S	
-全部支腿打开.....	15m
-单侧支腿打开.....	10m
MCWP2700S	
-全部支腿打开.....	18-20m
-单侧支腿打开.....	13-18m
最大平台高度(顶部锚定)	
MCWP1300S / MCWP2000S / MCWP2700S.....	25m
最大平台高度(桅柱锚定)	
MCWP1300S / MCWP2000S / MCWP2700S.....	100m
桅柱锚定间距	
MCWP1300S / MCWP2000S / MCWP2700S.....	12.5m
千斤顶	
MCWP1300S / MCWP2000S / MCWP2700S.....	65kN
底座运输重量	
MCWP1300S.....	3940kg
MCWP2000S / MCWP2700S.....	4140kg
提升速度	
MCWP1300S / MCWP2000S.....	6m/min
MCWP2700S.....	7m/min
镀锌桅柱规格	
MCWP1300S / MCWP2000S / MCWP2700S.....	1256mm/82kg
举升电机	
MCWP1300S.....	400V/50Hz/3.0kw/32A
MCWP2000S.....	2X400V/50Hz/2.2kw/32A
MCWP2700S.....	2X400V/50Hz/3.0kw/32A

#### 标准配置

- 防坠安全器
- 紧急停止按钮
- 限位开关
- 旋转伸缩调平支腿
- 电磁刹车
- 电流过载保护
- 水平指示器
- 中心千斤顶
- 上升保护霍尔传感器
- 操作提示喇叭
- 防冲顶装置
- 相位转换开关
- 下坠缓冲装置
- 活动遥控控制器
- 防坠测试系统
- 外墙锚定装置



MAST CLIMBER

WWW.CNDINGLI.COM